

SOLTM

From The World's Leading
Flooring Manufacturer  **UNILIN**

vitality
deluxe

LAMINATED
WOODEN
FLOORINGS



WATER PROOF LAMINATE FLOORING

UNICLIC 
Patented Technology

DEL - 567(AP) NEWPORT OAK

CPS[®]

Inspire Decor Space

Features:

- ◆ Water-Resistant
- ◆ Flat Surface, No Grooves
- ◆ True-to-Nature Texture
- ◆ AC4, Class 32 Durability
- ◆ Uniclic Installation System
- ◆ 25-Year Residential Warranty
- ◆ 5-Year Wet Warranty
- ◆ 10-Year Commercial Warranty

vitality deluxe

SERIES



DEL - 553(AP) SPRING OAK

DIMENSIONS

FORMAT

Length	1261 mm
Width	192 mm
Number of panels per pack	9
m² per pack	2.1790
Bevels	flat
Thickness	8 mm
Tongue and groove	Uniclic
Water resistant	Yes

FACTORY WARRANTY

	METHOD	PARAMETERS	VALUES	
Usage class	EN 13329		Class	21-22-23/31-32
CE	EN 14041:2004 / AC:2006	Notified body	NB 0766 - EPH Dresden	DOP : On pack
UKCA	EN 14041:2004 / AC:2006	Approved body	AB 0321 - Satra UK	DOP : On pack
Warranty	Residential use	See warranty conditions		
	Commercial use	See warranty conditions		
	Water resistancy	See warranty conditions		

GENERAL DATA (ACCORDING TO EN 13329)

	METHOD	PARAMETERS	NORM REQUIREMENTS	VALUES
Wear resistance	EN 13329		≥ 4000 cycles	≥ 4000 cycles
Wear class	EN 13329		AC4	AC4
Impact resistance	EN 17368d	Small ball	≥ 35mm	≥ 35mm
	EN 13329	Big ball	≥ 750mm	≥ 750mm
Scratch resistance	EN 438-2, 25		Charge ≥ 3N	Charge ≥ 3N
Effect of a castor chair	ISO 4918 (with underlay)	Type W (EN 12529)	25000 cycles	No change
Thickness swelling	ISO 24336	After 24h immersion at 20°C ≤	18%	≤ 18%
Locking strength	ISO 24334	F10,2 long side	≥ 1 kN/m	≥ 1 kN/m
		Fmax long side		≥ 1 kN/m
		Fs0,2 short side	≥ 2 kN/m	≥ 2 kN/m
		Fmax short side		≥ 2 kN/m
Effect of a furniture leg	EN 424		No damage shall be visible, when tested with foot type 0	No visible damage
Resistance to staining	EN 438	Group 1,2 Group 3	Class 5 Class 4	Class 5 Class 4
Light fastness	EN ISO 4892 2:2006/A1:2009 Procedure B - Cycle 5	Grey reference	Class ≥ 4	Class 4

ENVIRONMENT, SAFETY & HEALTH

	METHOD	PARAMETERS	NORM REQUIREMENTS	VALUES
Formaldehyde emission	EN 717-1	ppm	E1 < 0,1	< 0,01
Anti-static	EN 1815		≤ 2,0 kV	≤ 2,0 kV
Reaction to fire	EN 13501-1	Class		Cfl-s1
Thermal resistance	EN 12996:2001	m²K/W		0,055 m²K/W
Slip resistance	EN 13893	µ	µ ≥ 0,30	DS: µ ≥ 0,30

vitallity
deluxe



EN 14041:2004 / AC:2006
NB 0766 - EPH Dresden



EN 14041:2004 / AC:2006
AB 0321 - Satra UK



DEL - 569(AP) GREENWICH OAK



- -
 -
 -
 -
- DEL - 304(AP) WHITE OILED OAK
Standard Planks: 1261 x 192mm (49.6" x 7.5")
Flat, No Groves

DEL - 378(AP) NATURAL VARNISHED OAK
Standard Planks: 1261 x 192mm (49.6" x 7.5")
Flat, No Groves






DEL - 387(AP) SUNSET OAK
Standard Planks: 1261 x 192mm (49.6" x 7.5")
Flat, No Groves

DEL - 553(AP) SPRING OAK
Standard Planks: 1261 x 192mm (49.6" x 7.5")
Flat, No Groves





DEL - 557(AP) PROvence OAK
 Standard Planks: 1261 x 192mm (49.6" x 7.5")
 Flat, No Groves

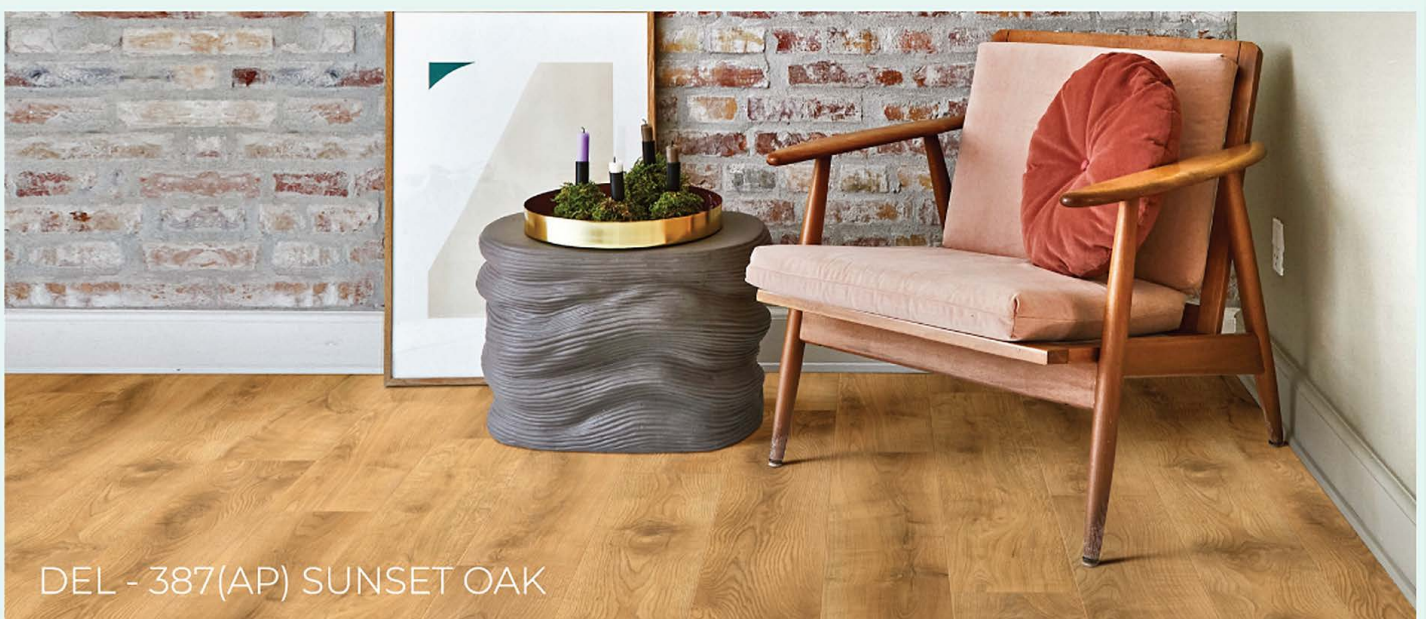



DEL - 567(AP) NEWPORT OAK
Standard Planks: 1261 x 192mm (49.6" x 7.5")
Flat, No Groves

DEL - 569(AP) GREENWICH OAK
Standard Planks: 1261 x 192mm (49.6" x 7.5")
Flat, No Groves





DEL - 557(AP) PROVENCE OAK



DEL - 304(AP) WHITE OILED OAK

vitality
deluxe

SOLTM

From The World's Leading
Flooring Manufacturer **UNILIN**



SCAN TO DOWNLOAD CATALOGUE

CPS[®]

Inspire Decor Space

Distributed By